

Flowfresh SRQ (5 - 6 mm)



Standard colour chart



Red 301



Grey 704




Green 602



Cream 103



Blue 502



Yellow 104

The applied colours may differ slightly from the examples shown above. Contact our customer services for a true colour sample or a special colour match. Special corporate colours and designs can be produced to special order.

Description

Flowfresh SRQ is a 5 - 6 mm heavy duty, chemical resistant antimicrobial treated polyurethane resin floor screed system. Attractive and positively textured, coloured quartz floor finish.

Uses

Ideal for wet processing zones such as food manufacturing, food preparation areas, and chemical processing plants.


Benefits

- Contains Polygiene, an antimicrobial additive based on silver ion technology
- Very high chemical resistance
- Easy to clean and sterilise surface, minimal joints
- Non-tainting, non-dusting
- High abrasion resistance
- Withstands high mechanical stress
- Good alternative to expensive acid resistant tiles
- Low odour during application
- Positive slip resistance
- Rapid installation

Project References

HEB, USA.

System Design

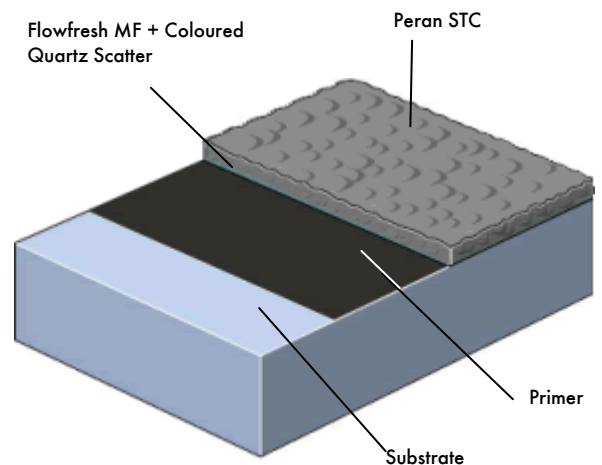

Model Specification

Product: Flowfresh SRQ
Finish: Gloss
Thickness: _____mm (5 or 6 mm)
Colour: _____
Preparatory work and application in accordance with suppliers instructions. Supplier: Flowcrete UK Ltd
Telephone : Customer Service - +44 (0)1270 753000

Substrate Requirements

Concrete or screed substrate should be a minimum of 25N/mm², free from laitance, dust and other contamination. The substrate should be dry to 75% RH as per BS 8204 and free from rising damp and ground water pressure. If no damp proof membrane is present, Hydraseal DPM can be incorporated directly beneath the Flowfresh SRQ system.

Products Included in this System

Primer: Flowprime @ 0.25 kg/m²
OR, where a dpm is required,
Hydraseal DPM @ 0.5 kg/m²

For 5mm system

Topping: Flowfresh MF @ 5.7 kg/m²
Scatter: Coloured Quartz, size 7 @ 4kg/m²

For 6mm system

Topping: Flowfresh MF @ 7.6 kg/m²
Scatter: Coloured Quartz, size 7 @ 5 kg/m²

Sealer (for 5 mm and 6 mm systems)

Peran STC @ 0.6 kg/m² (coarse texture)
Peran STC @ 0.4 kg/m² (extra coat for light texture)

Detailed application instructions are available upon request.

Installation Service

The installation should be carried out by a Flowcrete approved contractor with a documented quality assurance scheme. Obtain details of our approved contractors by contacting our customer service team or enquiring via our web site www.flowcrete.co.uk.

Microbial / Fungal Resistance

The Polygiene antimicrobial additive incorporated into Flowfresh SRQ provides control of most bacteria and fungi which come into contact with the floor.

Antimicrobial Active substance: Silver biocide
Tested: ISO 22196/JIS Z2801.

Note

No resin system is totally colour fast and may change colour over time (exhibits a yellowing effect). Colour change depends on the UV light and heat levels present and hence the rate of change cannot be predicted. This is more noticeable in very light colours but does not compromise the product's physical or chemical resistance characteristics. We have endeavoured to adopt colours within our standard range which minimise this change.

Intensively coloured products (e.g. hair colorants, medical disinfectants etc.) and plasticizer migration (e.g. from rubber tyres) can lead to irreversible discoloration in the surface. Please contact our Technical Services Department for further advice.

Flowcrete UK Ltd
The Flooring Technology Centre Booth Lane
Sandbach Cheshire CW11 3QF UK.
Tel: +44 (0) 1270 753000 Fax: +44 (0) 1270 753333
Email: uk@flowcrete.com
Flowcrete UK Ltd is an RPM company

Technical Information

The figures that follow are typical properties achieved in laboratory tests at 20 °C and at 50% Relative Humidity.

Reaction to fire	B _{FL} - s1	EN 13501-1
Wear Resistance	Abrasion quantity <1 cm ³	EN 13892-5
Bond Strength	> 2.5 N/mm ²	EN 13892-8
Impact Resistance	15 Nm	EN ISO 6272
Compressive Strength	> 50 N/mm ²	EN 13892-2
Flexural Strength	20 N/mm ²	EN 13892-2
Tensile Strength	12 N/mm ²	BS 6319-7
Temperature Resistance	Tolerant to intermittent spillages up to 60 °C or sustained heat from -20 °C to 50 °C	
Water Permeability	Nil - Karsten Test (impermeable)	
Vapour Permeability	ASTM E96:90 5 g / m ² / 24hrs (at 4 mm thick)	
Chemical Resistance	Contact Technical Department Excellent resistance to sugars and most acids (organic and inorganic)	

Slip Resistance Dry >40 low slip potential
Method described in BS 7976-2 (in accordance with HSE and UKSRG
typical values for 4-S rubber slider) guidelines)

The slipperiness of flooring materials can change significantly, due to the installation process, after short periods of use, due to inappropriate maintenance, longer-term wear and/ or surface contaminants (wet or dry).

Textured systems are recommended to meet slip resistance value requirements for wet conditions and/ or surface contaminants (wet or dry) - please contact our Technical Advisors for further details and specifications.

Complies with BS 8204-6/FeRFA type 8.

Speed of Cure

	10 °C	20 °C	30 °C
Light traffic	36 hrs	24 hrs	12 hrs
Full traffic	72 hrs	48 hrs	24 hrs
Full chemical cure	10 days	7 days	5 days

Environmental considerations

The finished system is assessed as non-hazardous to health and the environment. The long service life and seamless surface reduce the need for repairs, maintenance and cleaning. Environmental and health considerations are controlled during manufacture and application of the products by Flowcrete staff and fully trained and experienced contractors.

Aftercare - Cleaning and Maintenance

Clean regularly using a single or double headed rotary scrubber drier in conjunction with a mildly alkaline detergent.

Important Notes

Flowcrete's products are guaranteed against defective materials and manufacture and are sold subject to its standard Terms and Conditions of Sale, copies of which can be obtained on request.

Any suggested practices or installation specifications for the composite floor or wall system (as opposed to individual product performance specifications) included in this communication (or any other) from Flowcrete UK Ltd constitute potential options only and do not constitute nor replace professional advice in such regard. Flowcrete UK Ltd recommends any customer seek independent advice from a qualified consultant prior to reaching any decision on design, installation or otherwise.

Model Specification written for Flowcrete UK Ltd.
Please consult Technical Team in own country region for specific details.