

## Flowfresh SR (4–10 mm)

A slurry-broadcast, HACCP International certified, antimicrobial treated polyurethane resin floor screed system.



### Polygiene®:

Contains a silver ion antimicrobial additive that kills up to 99.9% bacteria.



### Chemical Resistant:

Excellent resistance to sugars and most acids (organic and inorganic).



### Slip Resistant:

Positively textured profile to minimise slip risks in wet areas.



### Wear Resistant:

Holds its own against impact, traffic and chemical attack.



Cream



Ochre



Mustard



Red



Dark Green



Dark Blue




Mid Grey



Dark Grey

The applied colours may differ from the examples shown. For a full colour chart and samples, contact your local Flowcrete office. Special corporate colours and designs can be produced to special order.

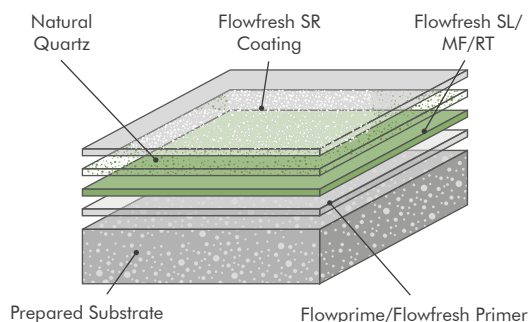

## Technical Profile\*

### FIRE RESISTANCE

EN 13501-1	B <sub>fl</sub> -s1
------------	---------------------

### WEAR RESISTANCE

EN 13892-5	<1 cm <sup>3</sup>
------------	--------------------

### BOND STRENGTH

EN 13892-8	>2.5 N/mm <sup>2</sup>
------------	------------------------

### TEMPERATURE RESISTANCE

At 8 mm: Tolerant to intermittent spillages up to 90°C or sustained heat from -20°C to 50°C.

At 9–10 mm: Tolerant to intermittent spillages up to 100°C or sustained heat from -20°C to 50°C.

### WATER PERMEABILITY

Karsten Test	Nil (impermeable)
--------------	-------------------

### VAPOUR PERMEABILITY

ASTM E96:90	3g/m <sup>2</sup> /24hrs (at 8 mm thick)
-------------	--

### SLIP RESISTANCE\*\*\* (in accordance with HSE & UKSRG guidelines)

BS 7976-2 (typical values for 4-S rubber slider)	Dry >40 low slip potential
--	-------------------------------

### COMPRESSIVE STRENGTH

EN 13892-2	>50 N/mm <sup>2</sup>
------------	-----------------------

### FLEXURAL STRENGTH

EN 13892-2	20 N/mm <sup>2</sup>
------------	----------------------

### TENSILE STRENGTH

BS 6319-7	7 N/mm <sup>2</sup>
-----------	---------------------

### BS 8204-6 / FeRFA

Type 6 (4mm), Type 8 (>6mm)

### SPEED OF CURE\*\*

	10°C	20°C	30°C
Light Traffic	36 hrs	24 hrs	12 hrs
Full Traffic	72 hrs	48 hrs	24 hrs
Full Chemical Cure	10 days	7 days	5 days

\*These figures are typical properties achieved in laboratory tests at 20°C and at 50% Relative Humidity.

\*\*\*The slipperiness of flooring materials can change significantly, due to the installation process, after short periods of use, due to inappropriate maintenance, longer-term wear and/or surface contaminants (wet or dry). Textured systems are recommended to meet slip resistance value requirements for wet conditions and/or surface contaminants (wet or dry) - please contact our Technical Advisors for further details and specifications.

## Model Specification

<b>Product</b>	Flowfresh SR
<b>Finish</b>	Matte

Preparatory work and application in accordance with manufacturer's instructions.

## Products Included in This System

<b>Primer</b>	Flowprime @ 0.25 kg/m <sup>2</sup> When a DPM <sub>w</sub> is required: Hydraseal DPM @ 0.5 kg/m <sup>2</sup> When high heat resistance is critical: Flowfresh Primer @ 0.25 kg/m <sup>2</sup>
<b>For 4 mm system</b>	<b>Topping:</b> Flowfresh SL (2mm) @ 3.8 kg/m <sup>2</sup> <b>Scatter:</b> Natural Quartz (0.3-0.8mm) @ 3.5 kg/m <sup>2</sup> <b>Sealer:</b> Flowfresh SR Coating @ 0.5 kg/m <sup>2</sup>
<b>For 6 mm system</b>	<b>Topping:</b> Flowfresh MF (4mm) @ 7.6 kg/m <sup>2</sup> <b>Scatter:</b> Natural Quartz (0.3-0.8mm) @ 5 kg/m <sup>2</sup> <b>Sealer:</b> Flowfresh SR Coating @ 0.5 kg/m <sup>2</sup>
<b>For 8 mm system</b>	<b>Topping:</b> Flowfresh RT (6mm) @ 12.6 kg/m <sup>2</sup> <b>Scatter:</b> Natural Quartz (0.3-0.8mm) @ 2.5 kg/m <sup>2</sup> <b>Sealer:</b> Flowfresh SR Coating @ 0.5 kg/m <sup>2</sup>
<b>For 9-10 mm system</b>	<b>Topping:</b> Flowfresh RT (8mm) @ 17 kg/m <sup>2</sup> <b>Scatter:</b> Natural Quartz (0.3-0.8mm) @ 2.5 kg/m <sup>2</sup> <b>Sealer:</b> Flowfresh SR Coating @ 0.5 kg/m <sup>2</sup>

**Note:** Flowfresh SL and MF must always be applied onto a primed surface. Flowprime is suitable for general use, but Flowfresh Primer should be used if the area is exposed to heat (above 50°C) or hot liquids (above 60°C).

Detailed application instructions are available upon request.

## Substrate Requirements

Concrete or screed substrate should be a minimum of 25 N/mm<sup>2</sup>, free from laitance, dust and other contamination. The substrate should be dry to 75% RH as per BS8203 and free from rising damp and ground water pressure. If no damp proof membrane is present, Hydraseal DPM can be incorporated directly beneath the Flowfresh SR system.

## Installation Service

The installation should be carried out by a Flowcrete approved contractor with a documented quality assurance scheme. Obtain details of our approved contractors by contacting our customer service team or enquiring via our web site [www.flowcrete.co.uk](http://www.flowcrete.co.uk).

## Notes

No resin system is totally colour fast and may change colour over time (exhibits a yellowing effect). Colour change depends on the UV light and heat levels present and hence the rate of change cannot be predicted. This is more noticeable in very light colours but does not compromise the product's physical or chemical resistance characteristics. We have endeavoured to adopt colours within our standard range which minimise this change. Intensively coloured products (e.g. hair colorants, medical disinfectants etc.) and plasticizer migration (e.g. from rubber tyres) can lead to irreversible discoloration in the surface. Please contact our Technical Services Department for further advice.

## Microbial / Fungal Resistance

The Polygiene® antimicrobial additive in the floor system provides control of most bacteria and fungi which come into contact with the floor.

<b>Antimicrobial Active Substance</b>	Silver biocide
<b>Tested</b>	ISO 22196 / JIS Z2801

## Aftercare, Cleaning & Maintenance

Clean regularly using a single or double headed rotary scrubber drier in conjunction with a mildly alkaline detergent.

Flowcrete's products are guaranteed against defective materials and manufacture and are sold subject to its standard Terms and Conditions of Sale, copies of which can be obtained on request. Any suggested practices or installation specifications for the composite floor or wall system (as opposed to individual product performance specifications) included in this communication (or any other) from Flowcrete UK Ltd constitute potential options only and do not constitute nor replace professional advice in such regard. Flowcrete UK Ltd recommends any customer seek independent advice from a qualified consultant prior to reaching any decision on design, installation or otherwise.

System Datasheet written for Flowcrete UK Ltd. Please consult Technical Team in your own country region for specific details. [05/12/18, 01 UK]